




Suono F.R. / Ref. SR/820

EIGENSCHAFTEN

| | |
|--------------------------------------|--|
| Width cm | 250 |
| Thickness | 0,55 |
| Weight g/m2 | 430 |
| Solar_Trasmission | 19 |
| Solar_Reflection | 72 |
| Solar_Absorption | 9 |
| Light_Transmission | 17 |
| Light_Absorption | 80 |
| GtotInt | 0,34 |
| UV_Reduction | 98 |
| Sound_Absorption | 0,8 |
| Ref. | SR/820 |
| Composition | 36% FV 64% PVC |
| F.R. Classification | Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO |
| HealthCertification | GREENGUARD, OEKO-TEX |
| Transparency | Dimout |
| Colour_fastness_ to_light | 7/8 |
| Outdoor | No |
| Sealable | Heat |
| adjustable | Yes |
| jointed | Si |
| IMO | IMO |
| Tone | White |
| Warp_daN5cm | 150 |
| Weft_daN5cm | 120 |

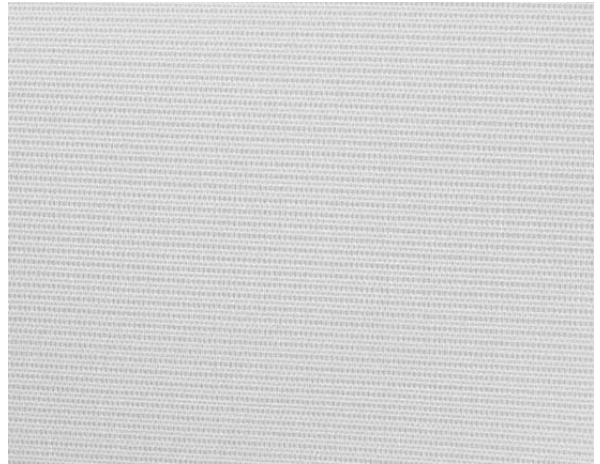

Rullo



Suono F.R. / Ref. SR/822

EIGENSCHAFTEN

| | |
|------------------------------|--|
| Width cm | 250 |
| Thickness | 0,55 |
| Weight g/m2 | 430 |
| Solar_Trasmision | 14 |
| Solar_Reflection | 42 |
| Solar_Absorption | 44 |
| Light_Transmission | 11 |
| Light_Absorption | 43 |
| GtotInt | 0,44 |
| UV_Reduction | 98 |
| Sound_Absorption | 0,8 |
| Ref. | SR/822 |
| Composition | 36% FV 64% PVC |
| F.R. Classification | Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO |
| HealthCertification | GREENGUARD, OEKO-TEX |
| Transparency | Dimout |
| Colour_fastness_ to_light | 7/8 |
| Outdoor | No |
| Sealable | Heat |
| adjustable | Yes |
| jointed | Si |
| IMO | IMO |
| Tone | Grey/Black |
| Warp_daN5cm | 150 |
| Weft_daN5cm | 120 |




Rullo



Suono F.R. / Ref. SR/821

EIGENSCHAFTEN

| | |
|------------------------------|--|
| Width cm | 250 |
| Thickness | 0,55 |
| Weight g/m2 | 430 |
| Solar_Trasmission | 19 |
| Solar_Reflection | 65 |
| Solar_Absorption | 16 |
| Light_Transmission | 16 |
| Light_Absorption | 71 |
| GtotInt | 0,36 |
| UV_Reduction | 98 |
| Sound_Absorption | 0,8 |
| Ref. | SR/821 |
| Composition | 36% FV 64% PVC |
| F.R. Classification | Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO |
| HealthCertification | GREENGUARD, OEKO-TEX |
| Transparency | Dimout |
| Colour_fastness_ to_light | 7/8 |
| Outdoor | No |
| Sealable | Heat |
| adjustable | Yes |
| jointed | Si |
| IMO | IMO |
| Tone | Natural |
| Warp_daN5cm | 150 |
| Weft_daN5cm | 120 |

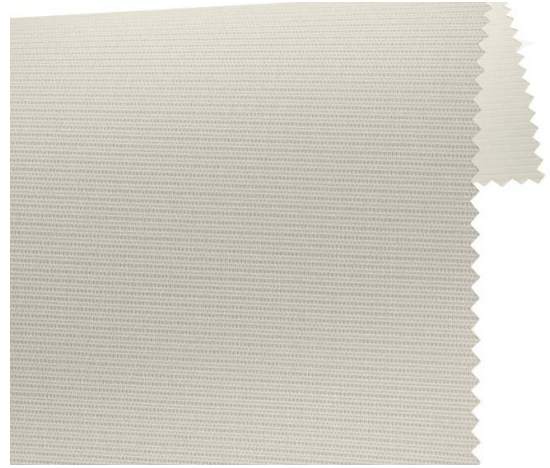

Rullo