




## Suono F.R. / Art. SR/820

### CARACTERISTICAS

<b>Width cm</b>	250
<b>Thickness</b>	0,55
<b>Weight g/m2</b>	430
<b>Solar_Trasmission</b>	19
<b>Solar_Reflection</b>	72
<b>Solar_Absorption</b>	9
<b>Light_Transmission</b>	17
<b>Light_Absorption</b>	80
<b>GtotInt</b>	0,34
<b>UV_Reduction</b>	98
<b>Sound_Absorption</b>	0,8
<b>Ref.</b>	SR/820
<b>Composition</b>	36% FV 64% PVC
<b>F.R. Classification</b>	Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO
<b>HealthCertification</b>	GREENGUARD, OEKO-TEX
<b>Transparency</b>	Dimout
<b>Colour_fastness_ to_light</b>	7/8
<b>Outdoor</b>	No
<b>Sealable</b>	Heat
<b>adjustable</b>	Yes
<b>jointed</b>	Si
<b>IMO</b>	IMO
<b>Tone</b>	White
<b>Warp_daN5cm</b>	150
<b>Weft_daN5cm</b>	120

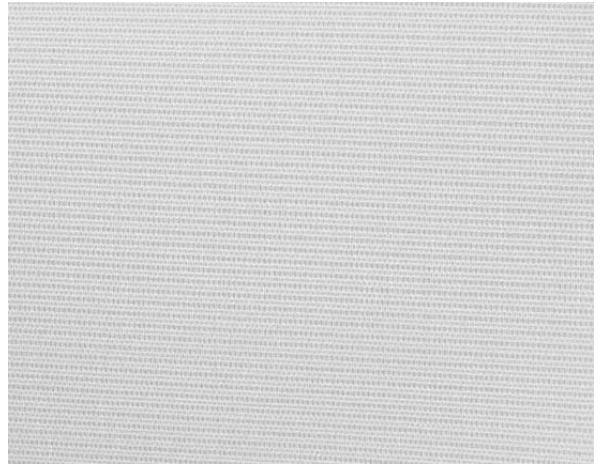

Rullo



## Suono F.R. / Art. SR/822

### CARACTERISTICAS

Width cm	250
Thickness	0,55
Weight g/m2	430
Solar_Trasmision	14
Solar_Reflection	42
Solar_Absorption	44
Light_Transmission	11
Light_Absorption	43
GtotInt	0,44
UV_Reduction	98
Sound_Absorption	0,8
Ref.	SR/822
Composition	36% FV 64% PVC
F.R. Classification	Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO
HealthCertification	GREENGUARD, OEKO-TEX
Transparency	Dimout
Colour_fastness_ to_light	7/8
Outdoor	No
Sealable	Heat
adjustable	Yes
jointed	Si
IMO	IMO
Tone	Grey/Black
Warp_daN5cm	150
Weft_daN5cm	120




Rullo



## Suono F.R. / Art. SR/821

### CARACTERISTICAS

Width cm	250
Thickness	0,55
Weight g/m2	430
Solar_Trasmission	19
Solar_Reflection	65
Solar_Absorption	16
Light_Transmission	16
Light_Absorption	71
GtotInt	0,36
UV_Reduction	98
Sound_Absorption	0,8
Ref.	SR/821
Composition	36% FV 64% PVC
F.R. Classification	Euroclass C-s3- d0 (EU), Classe 1 (I), M1 (F), BS (GB), NFPA 701 (US), F3 (F), IMO
HealthCertification	GREENGUARD, OEKO-TEX
Transparency	Dimout
Colour_fastness_ to_light	7/8
Outdoor	No
Sealable	Heat
adjustable	Yes
jointed	Si
IMO	IMO
Tone	Natural
Warp_daN5cm	150
Weft_daN5cm	120

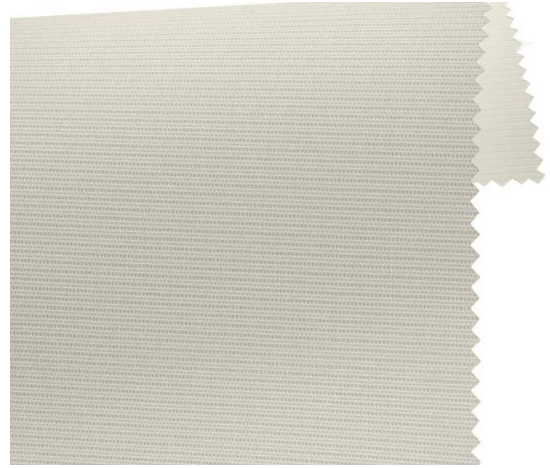

Rullo