


# Soltis B92 Blackout F.R. /

Art. SL/771

## CARACTERISTICAS

<b>Width cm</b>	170
<b>Thickness</b>	0,6
<b>Weight g/m2</b>	650
<b>Solar_Reflection</b>	72
<b>Solar_Absorption</b>	28
<b>Light_Absorption</b>	76
<b>GtotInt</b>	0,33
<b>GtotExt</b>	0,01
<b>Ref.</b>	SL/771
<b>Composition</b>	27% PL 73% PVC
<b>F.R. Classification</b>	Classe 2 (I), B1 (D), M2 (F),BS (GB), NFPA 701(US), VKF (CH)
<b>HealthCertification</b>	GREENGUARD GOLD
<b>Transparency</b>	Blackout
<b>Outdoor</b>	Outdoor
<b>Sealable</b>	Heat
<b>adjustable</b>	Yes
<b>jointed</b>	Si
<b>IMO</b>	No
<b>Tone</b>	White
<b>Warp_daN5cm</b>	330
<b>Weft_daN5cm</b>	220

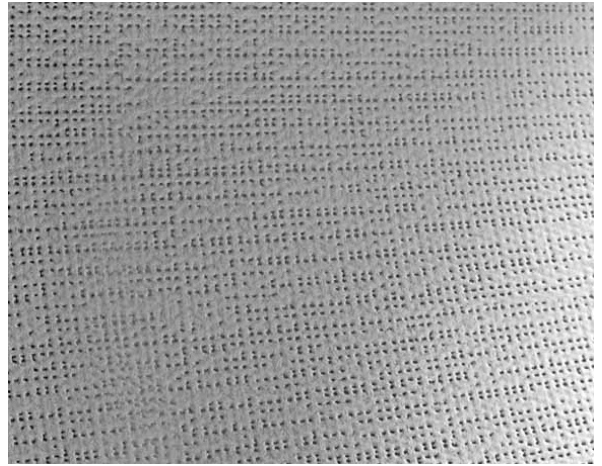

Rullo




Lucernari

# Soltis B92 Blackout F.R. /

## Art. SL/774

### CARACTERISTICAS

<b>Width cm</b>	170
<b>Thickness</b>	0,6
<b>Weight g/m2</b>	650
<b>Solar_Reflection</b>	35
<b>Solar_Absorption</b>	65
<b>Light_Absorption</b>	39
<b>GtotInt</b>	0,44
<b>GtotExt</b>	0,03
<b>Ref.</b>	SL/774
<b>Composition</b>	27% PL 73% PVC
<b>F.R. Classification</b>	Classe 2 (I), B1 (D), M2 (F),BS (GB), NFPA 701(US), VKF (CH)
<b>HealthCertification</b>	GREENGUARD GOLD
<b>Transparency</b>	Blackout
<b>Outdoor</b>	Outdoor
<b>Sealable</b>	Heat
<b>adjustable</b>	Yes
<b>jointed</b>	Si
<b>IMO</b>	No
<b>Tone</b>	Grey/Black
<b>Warp_daN5cm</b>	330
<b>Weft_daN5cm</b>	220

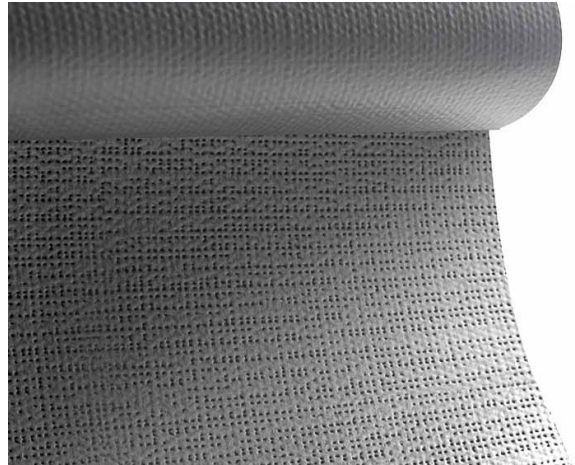

Rullo




Lucernari

# Soltis B92 Blackout F.R. /

Art. SL/773

## CARACTERISTICAS

<b>Width cm</b>	170
<b>Thickness</b>	0,6
<b>Weight g/m2</b>	650
<b>Solar_Reflection</b>	49
<b>Solar_Absorption</b>	51
<b>Light_Absorption</b>	53
<b>GtotInt</b>	0,4
<b>GtotExt</b>	0,03
<b>Ref.</b>	SL/773
<b>Composition</b>	27% PL 73% PVC
<b>F.R. Classification</b>	Classe 2 (I), B1 (D), M2 (F),BS (GB), NFPA 701(US), VKF (CH)
<b>HealthCertification</b>	GREENGUARD GOLD
<b>Transparency</b>	Blackout
<b>Outdoor</b>	Outdoor
<b>Sealable</b>	Heat
<b>adjustable</b>	Yes
<b>jointed</b>	Si
<b>IMO</b>	No
<b>Tone</b>	Grey/Black
<b>Warp_daN5cm</b>	330
<b>Weft_daN5cm</b>	220

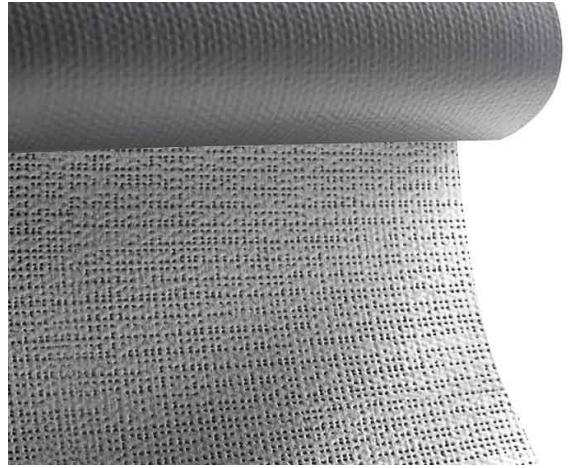

Rullo



Lucernari



# Soltis B92 Blackout F.R. /

Art. SL/772

## CARACTERISTICAS

Width cm	170
Thickness	0,6
Weight g/m2	650
Solar_Reflection	12
Solar_Absorption	88
Light_Absorption	16
GtotInt	0,52
GtotExt	0,05
Ref.	SL/772
Composition	27% PL 73% PVC
F.R. Classification	Classe 2 (I), B1 (D), M2 (F),BS (GB), NFPA 701(US), VKF (CH)
HealthCertification	GREENGUARD GOLD
Transparency	Blackout
Outdoor	Outdoor
Sealable	Heat
adjustable	Yes
jointed	Si
IMO	No
Tone	Brown
Warp_daN5cm	330
Weft_daN5cm	220



Rullo



Lucernari